



SERVICE		PRP	ESP
POWER	kVA	60	60
POWER	kW	48	48
RATED SPEED	r.p.m.	1.500	
MAIN VOLTAGE	V	400/230	
AVAILABLE VOLTAGES	V	200/115 · 230 V (t)	
RATED AT POWER FACTOR	Cos Phi	0,8	



RENTAL RANGE

HIMOINSA Company with quality certification ISO 9001

HIMOINSA gensets are compliant with EC mark which includes the following directives:

- 2006/42/CE Machinery safety.
- 2014/30/UE Electromagnetic compatibility.
- 2014/35/UE electrical equipment designed for use within certain voltage limits
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- (UE) N° 2016/1628 Emissions of gaseous and particulate pollutants
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Prime Power (PRP):

According to ISO 8528-1:2018, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24 h of operation shall not exceed 70 % of the PRP.

Emergency Standby Power (ESP):

According to ISO 8528-1:2018, Emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP

Continuous Power (COP): According to Standard ISO 8528-1:2018, this is the maximum power available for continuous loads for unlimited running hours a year between the maintenance times recommended by the manufacturer under the environmental conditions established by the same.

Class G2 performance according to the load impact test according to ISO 8528-5:2018

HIMOINSA HEADQUARTERS:

Fábrica: Ctra. Murcia - San Javier, Km. 23,6 | 30730 SAN JAVIER (Murcia) Spain
Tel.+34 968 19 11 28 Fax +34 968 19 12 17 Fax +34 968 19 04 20 |
info@himoinsa.com | www.himoinsa.com

Manufacture facilities:

SPAIN • FRANCE • INDIA • CHINA • USA • BRAZIL • ARGENTINA

Subsidiaries:

PORTUGAL | POLAND | GERMANY | UK | SINGAPORE | UAE | PANAMA |
DOMINICAN REPUBLIC | ARGENTINA | ANGOLA | SOUTH AFRICA | MOROCCO



SOUNDPROOFED RENTAL



CS5R



WATER-COOLED



THREE PHASE



50 HZ



STAGE V



DIESEL

Himoinsa has the right to modify any feature without prior notice.

Weights and dimensions based on standard products. Illustrations may include optional equipment.

Technical data described in this catalogue correspond to the available information at the moment of printing.

The illustrations and images are indicative and may not coincide in their entirety with the product.

Industrial design under patent.



Engine Specifications | 1.500 r.p.m.

Rated Engine Output (PRP)	kW	54
Rated Engine Output (ESP)	kW	54
Manufacturer	FPT_IVECO	
Model	F34.TEVP01	
Engine Type	4-stroke diesel	
Injection Type	Direct, common rail	
Aspiration Type	Turbocharged and after-cooled	
Number of cylinders and arrangement	4-L	
Bore and Stroke	mm	99 x 110
Displacement	L	3,4
Cooling System	Liquid (water + 50% glycol)	
Lube Oil Specifications	ACEA E6, ACEA E9, API CJ-4	
Compression Ratio	17;1	

Lube oil consumption with full load	g/kWh	0,25
Total oil capacity including tubes, filters	L	9,5
Total coolant capacity	L	14,6
Governor	Type	Electrical
Air Filter	Type	Dry



- Diesel engine
- 4-stroke cycle
- Water-cooled
- 12V electrical system
- Dry air filter
- Radiator with pusher fan
- HTW sender
- Mechanical governor
- Hot parts protection
- Moving parts protection
- Radiator water level sensor (Opcional).
- LOP sender (Opcional).



Generator Specifications | STAMFORD

Manufacturer	STAMFORD	
Model	UCI224E	
Poles	No.	4
Connection type (standard)	Star-series	
Mounting type	S-3 11*1/2	
Insulation	Class	H class

Enclosure (according IEC-34-5)	IP23
Exciter system	Self-excited, brushless
Voltage regulator	A.V.R. (Electronic)
Bracket type	Single bearing
Coupling system	Flexible disc
Coating type	Standard (Vacuum impregnation)




- Self-excited and self-regulated
- IP23 protection
- H class insulation

WEIGHT AND DIMENSIONS

Standard Version		
Length (L)	mm	2660
Height (H)	mm	1600
Width (W)	mm	1110
Maximum shipping volume	m ³	4,72
Weight with liquids in radiator and sump	Kg	1690
Fuel tank capacity	L	216
Autonomy (70% PRP)	Hours	22
Autonomy (100% PRP)	Hours	16

Steel tank

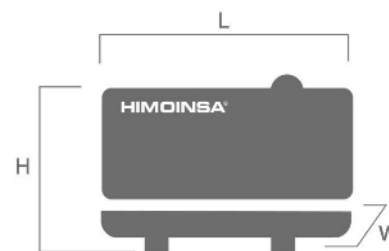

SOUND PRESSURE

Sound pressure level	dB(A)@7m	62 ± 2,4
----------------------	----------	----------

APPLICATION DATA

EXHAUST SYSTEM

Maximum exhaust temperature	°C	760
Maximum allowed back pressure	mbar	220
Exhaust Flange Size (external diameter)	mm	90

NECESSARY AMOUNT OF AIR

Intake air flow	m ³ /h	193,3
Cooling Air Flow	m ³ /s	1
Alternator fan air flow	m ³ /s	0,216

FUEL CONSUMPTION

Fuel Consumption ESP	l/h	13,9
Fuel Consumption 100% PRP	l/h	13,9
Fuel Consumption 70 % PRP	l/h	9,8
Fuel Consumption 50 % PRP	l/h	7,2

FUEL SYSTEM

Fuel Oil Specifications	Diesel	
Fuel Tank	L	216

STARTING SYSTEM

Starting power	KW	4,2
Starting power	CV	5,71
Auxiliary Voltage	Vdc	12



Soundproofed version

- Steel chassis
- Manhole to fill the radiator
- Pre-installation or niche to house the quick connection hydraulic fittings for fuel transfer
- Anti-leakage chassis, predisposed to retain liquids (retention tray)
- Manhole for fuel tank cleaning and drainage
- Tilting cap in the exhaust
- Anti-vibration shock absorbers
- Chassis with integrated fuel tank
- Fuel level gauge
- Bodywork made from high quality steel plate
- High mechanical strength
- Low noise emissions level
- Soundproofing provided by high-density volcanic rock wool
- Epoxy polyester powder coating
- Full access for maintenance (water, oil and filters, no need to remove the canopy)
- Oil sump extraction kit
- External filling of the fuel tank with safety key
- Emergency stop button (double emergency stop protection: Interior on the panel + Exterior on the bodywork)
- Mechanized for power cable output
- Door with window to visualize control panel, alarms and measurements
- Pressure locks
- IP Protection according to ISO 8528-13:2016